

# atc 5 Litre and 10 Litre Under Sink Water Heaters

Compact Design for Point  
of Use Applications!



# atc

Hot Water Solutions Made Easy




# atc 5 litre and 10 litre Under Sink Water Heaters

For commercial applications the 5 Litre and 10 Litre **atc** unvented under sink water heaters are the ideal solution for supplying a number of sinks, depending on the hot water demand, without the need for special taps. This can prove more cost effective than installing a traditional vented system.

## TECHNICAL SPECIFICATIONS


- Easy to install
- Available in 5 litre and 10 litre.
- High density polyurethane foam insulation which reduces radiant heat loss, reduces energy consumption and ensures high energy efficiency.
- Exclusive dry powder porcelain enamel tank lining delivering twice the corrosion resistance of ordinary glass lining.
- Fitted with heavy duty seamless bolt - on square flange type heating elements which are more durable and efficient.
- Fitted with premium protective magnesium anode rod which equalises aggressive water action and provides extra protection against corrosion.
- External thermostat control allows adjustment to preferred water temperature.
- Fitted with limiting device to provide protection of overheating.
- Supplied with expansion relief valve calibrated at 6 Bar
- Wall or floor mounting
- Supplied with wall brackets.

**Offices, Canteens, Mobile Homes, Apartments and Work shops**

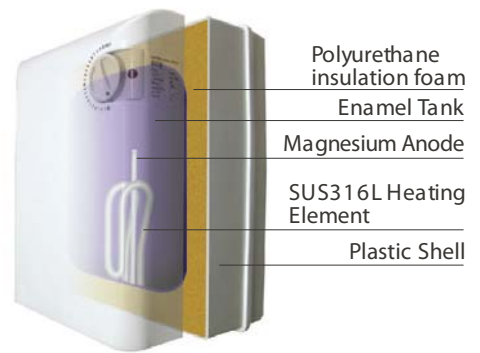

## TECHNICAL DATA

Product Code	Z - 5U	Z - 10U
Capacity (L / Gal)	5L / 1.1Gal	10L / 2.2Gal
Power Watts (W)	2000W	2000W
Voltage (V)	230V	230V
Frequency (Hz)	50 / 60 Hz	50 / 60Hz
Max Pressure (Bar)	6 Bar	6 Bar
Connections	1/2"	1/2"
Thermostat	External	External
Approvals	CCC, CE, RoHs	CCC, CE, RoHs

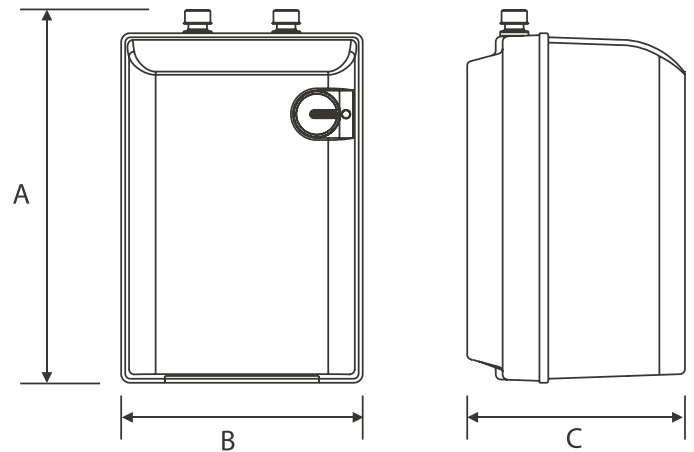

### RECOMMENDED SELECTION GUIDE

Capacity of Water Heater	Number of Basins
5 litres	1 - 2
10 litres	2 - 3
15 litres	3 - 4

Note: These figures are for guidance only.

### HEAT UP TIME

5 litres	9 minutes
10 litres	21 minutes

Dimensions	Z-5U	Z-10U
Height (mm) A	300mm	415mm
Width (mm) B	260mm	273mm
Depth (mm) C	246mm	246mm

