



Ariett Standard & Long Life (LL) Surface Fans



The Ariett standard and long life wall or ceiling mounted centrifugal fans for intermittent or continuous ventilation of bathrooms, toilets, kitchens or utility rooms. This range is available with standard or long life motors (30,000 hours). Splash proof IPX4. Can be ducted 6m

TECHNICAL SPECIFICATIONS

- 100mm diameter spigot standard
- 7 models available with or without the option of timer, continuous ventilation, PIR and Humidity control
- Available with standard motors or long life motors 30,000 hours.
- Wall or ceiling mounted
- Can be ducted up to 6m
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 60335-2-80, CEI EN 60529 (code IP) and CEI 107-53/1986.



Pressure/Performance Curves

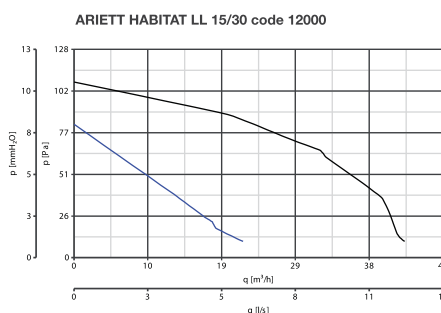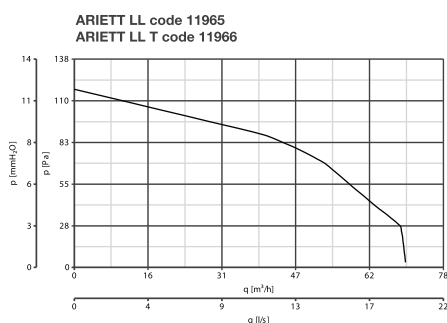


11961, 11976, 11965, 11966, 12015

12000

12001

Dimensions (mm)

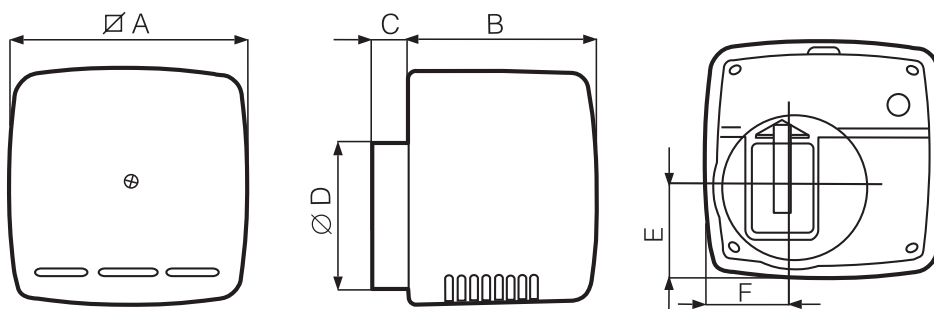

	∅ A	B	C	∅ D	E	F	KG
ARIETT	156	123	25	97	60	60	1.5



Ariett Standard & Long Life (LL) Surface Fans

The Ariett standard and long life wall or ceiling mounted centrifugal fans for intermittent or continuous ventilation of bathrooms, toilets, kitchens or utility rooms. This range is available with standard or long life motors (30,000 hours). Splash proof IPX4. Can be ducted 6m..

Ariett® Standard Range STANDARD

CODE	ARIETT SURFACE DUCT FAN 100mm (19.4 L/S) WALL / CEILING 70m³/h IPX4	BOX QTY
11961	ARIETT DUCT FAN	6
11976	ARIETT DUCT FAN C/W TIMER TIMER	6



11976.

Ariett® Long Life LONG LIFE 30.000h

CODE	ARIETT SURFACE DUCT FAN 100mm (19.4 L/S) WALL / CEILING 70m³/h IPX4	BOX QTY
11965	ARIETT DUCT FAN LONG LIFE	6
11966	ARIETT DUCT FAN C/W TIMER TIMER	6



Ducted installation.

Ariett® Habitat (Silent Operation) LONG LIFE 30.000h

For continuous ventilation, with boost facility. Ideal for use in public sector housing in bathrooms, showers, utilities and toilets.

CODE	ARIETT HABITAT DUCT FAN 100mm WALL / CEILING 70m³/h IPX4	BOX QTY
12000	ARIETT HABITAT FAN LL 15/30 (20 ^① /43 ^② m³/h) (5.6/11.9 l/s)	4
12001	ARIETT HABITAT FAN LL 20/75 (27 ^① /85 ^② m³/h) (7.5/23.6 l/s)	4

① Min. Speed ② Max. Speed

NOTE: The Ariett Habitat fan must be installed with the following items:
G2RSNI230AC(S) Relay plug-in 5-pin SPDT 10A P2RF08E Socket DIN rail/surface mounting 8-pin

Please contact Technical@ATC.ie for more details.



Wall or ceiling-mounted installation.

Ariett® PIR PIR Passive Infrared LONG LIFE 30.000h

CODE	ARIETT PIR SURFACE DUCT FAN 100mm (19.4 L/S) WALL / CEILING 70m³/h IPX4	BOX QTY
12015	ARIETT PIR	2



12015.